

TATA MOTORS | Better
COMMERCIAL VEHICLES | Always



**Commute made simpler
and cleaner.**



TATA
Starbus EV




Starbus 4/12 EV Bus Specifications


Specifications	
GVW	19500 kg
Overall Dimensions	
Wheel Base	6300 mm
Front Overhang	2399 mm
Rear Overhang	3055 mm
Overall Height	3400 + 50 mm
Overall Length	12050 + 50 mm
Floor Height	400 mm
Overall Width	2600 mm (without mirrors)
Passenger Door	2 or 3 as per requirement
Turning Circle Diameter	19.7 m
LV System Voltage	24 V
Tyres	295/80 R22 7 nos.
Brakes	Front Disc and Rear Drum
Suspension	Air Suspension
Steering	Integral Hydraulic Power Assisted
Other Specifications	
Regulatory Requirements / Compliances	AIS - 052, FAME, CMVR

HV System Specifications	
Traction Motor Peak Power	245 kW
Traction Motor Peak Torque	2950 Nm
HV Battery	657 V DC
Battery Energy	400 kWh
Transmission	Direct Drive
Charger	Off Board Charging, CCS 2 Charging Standard
Performance Specifications	
Gradeability	17%
Acceleration	As per CMVR
Max Speed	70 kmph
Seating	
Seating Capacity	35+Wheel Chair, 17+ 2 Wheel Chairs
Seating Layout	2x2
Seat Type	High Head Rest/Plastic Molded

17+D 2x2 High Back Seats

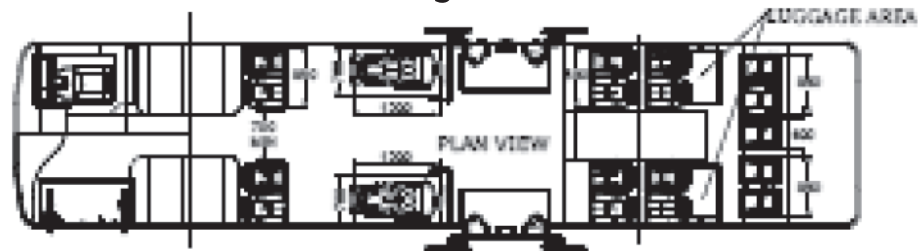

37+D 2x2 High Back Reclining Seats

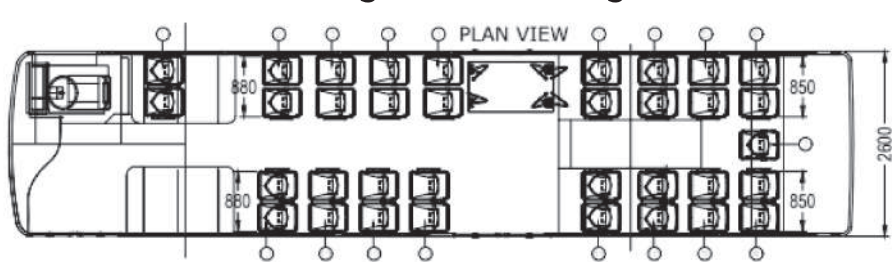

For more information, visit busesandvans.tatamotors.com | ☎ 1800 209 7979

You can also contact our Sales Office: Tata Motors Limited, 4th Floor, Ahura Centre, 82, Mahakali Caves Road, MIDC, Andheri (East), Mumbai - 400 093.

*Terms & Conditions apply. All pictures shown are for illustration purpose only. Actual product may vary. CAUTION: Accessories shown in the picture or elsewhere do not constitute standard fitment. The specifications are merely indicative. Due to continuous product improvements, these specifications are liable to change without notice.